

DE

**Warnung! Stromschlaggefahr!**

Alle Anschluss- und Wartungsarbeiten sind von einer elektrotechnischen Fachkraft im spannungslosen Zustand durchzuführen.



**Bestimmungsgemäße Verwendung**

Diese Leuchte ist nur für den Einbau in trockenen Innenräumen mit einer Umgebungstemperatur von ca. ta= 25°C bestimmt.

**Diese Leuchte enthält eine vom Benutzer nicht auswechselbare LED-Lichtquelle!**

Die Lichtquelle dieser Leuchte darf nur vom Hersteller oder einem von ihm beauftragten Servicetechniker ersetzt werden.

Berühren Sie die LED-Module weder im laufenden noch im ausgeschalteten Betrieb.



**Montagehinweis**

Es ist unbedingt darauf zu achten, dass die bauseits verwendeten Befestigungsteile für das 5-fache Leuchtengewicht ausgelegt sein müssen. Bei der Arbeiten an der Leuchte besteht Verletzungsgefahr durch Schneiden, Klemmen und Quetschen!

**Haftung**

Der Hersteller übernimmt keine Haftung für Schäden, die durch unsachgemäßen Einsatz oder Handhabung entstehen.

**Umwelthinweis**

Das Produkt gehört am Ende seiner Lebensdauer nicht in den normalen Hausmüll, sondern muss gemäß WEEE-Richtlinie getrennt gesammelt und sicher entsorgt werden.



EN

**Warning! Electric Shock Hazard!**

Installation, repair and maintenance work may only be carried out by qualified personnel when the power system has been disconnected.



**Approved utilisation**

This fixture is only suitable for mounting in dry indoor rooms with a regulated ambient temperature of approx. 25°C .

**This luminaire is fitted with a LED light source that is not exchangeable by the user!**

The light source in this luminaire may only be exchanged by the manufacturer directly or by a service technician that they have appointed.

Never touch the LED-modules, neither in operating mode or while switched off.



**Note to installation**

It is important to ensure that the mounting pieces or fasteners used on site must be able to hold 5 times the weight of the light fixture. There is a risk of cutting, clamping or crushing injuries during work at the luminaire.

**Liability**

The manufacturer is not liable for damages caused by improper use or handling.

**Environmental remark**

This product does not belong in the normal household waste at the end of it's lifespan, but must be collected separately in accordance with the WEEE Directive and disposed of safely.



MONTAGEANLEITUNG

INSTALLATION INSTRUCTIONS

562R G3 OP-L LED /840...




\*Diese Leuchte enthält eine Lichtquelle der Energieeffizienzklasse F

\*This luminaire contain a light source of energy efficiency class F

-> ENKTRO Discus 2250lm 300-600mA 39,8V 840 – Eprel – kein Eintrag


### 562R G3 OP-L LED /840...

a

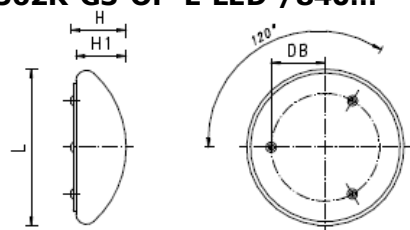

Typ	L	H	H1	DB
562R	373 mm	118 mm	103 mm	R123 mm

b

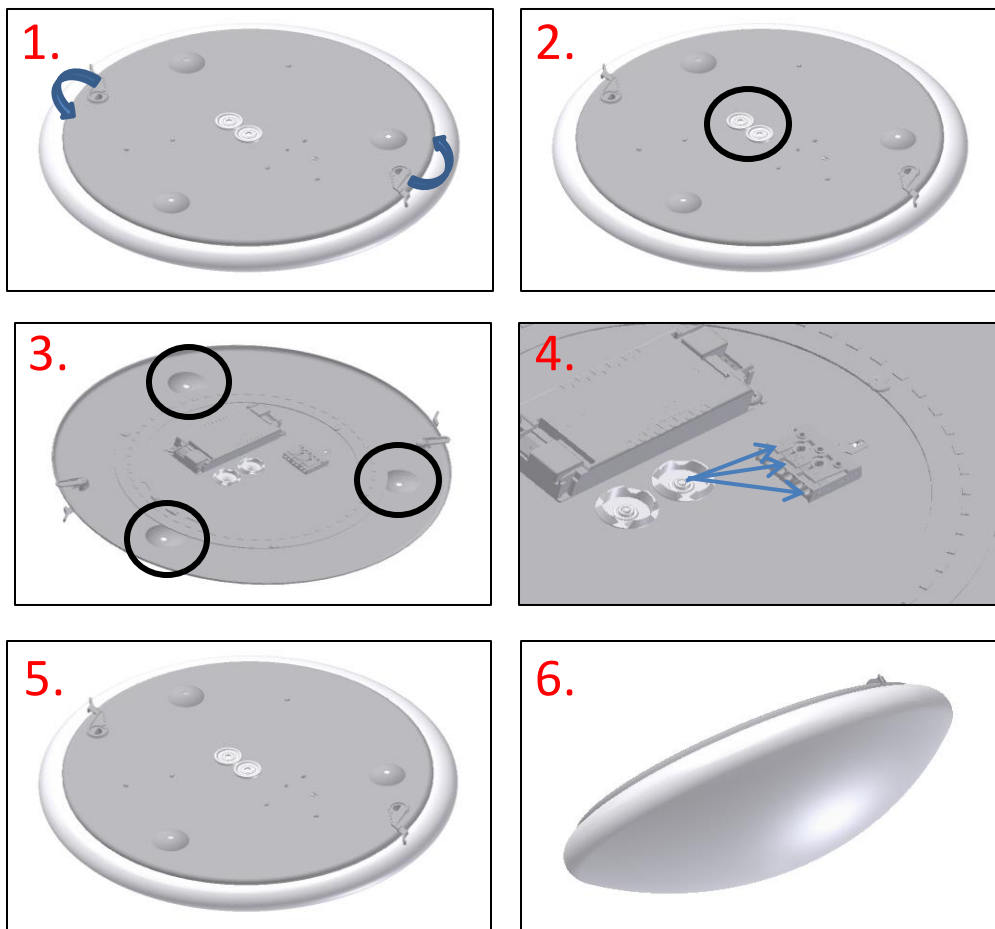

DE

#### Anbauleuchte

Direkt strahlende LED-Wannen-Anbauleuchte 562R OP-L. Leuchtenkörper aus Stahlblech pulverbeschichtet. Linsenförmige Opalwanne aus Acrylglas (PMMA).

**Achtung:** Die Leuchten dürfen nicht durch wärmedämmendes Material abgedeckt werden.

#### Montage:

1. Vor der Montage die Verschlussriegel öffnen und die Wanne abnehmen.
2. Anschlusskabel rückseitig durch Gehäuseöffnung einführen.
3. Leuchte an den dafür vorgestanzten Befestigungspunkten anschrauben. Die Abmessungen für die Deckenbefestigung bitte der obenstehenden Tabelle + Zeichnung entnehmen.
4. Netzanschluss an Steckklemme vornehmen!  
Achtung: PVC Isolierung der Netzanschlussleitung darf max. 20mm in das Gehäuse reichen.
5. Wanne auf Gehäuse setzen und durch die Verschlussriegel schließen.

#### Technische Daten:

U: 230V / 50Hz  
Schutzklasse: I  
Schutzart: IP40 in Richtung Nutzraum  
Leuchten Gewicht: ca. 1,2kg

#### Hinweise:

„NUR FÜR TROCKENE INNENRÄUME“  
„GEEIGNET FÜR FESTE INSTALLATION“  
„ALLE ARBEITEN NUR IM ELEKTRISCH SPANNUNGSLOSEN ZUSTAND DURCHFÜHREN“

EN

#### Mounted luminaire

Direct distribution LED surface-mounted luminaire 562R OP-L. Luminaire body made of sheet steel powder coated. Acrylic opal glass pan (PMMA).

**Attention:** The luminaires must not be covered by heat-insulating material.

#### Assembly:

1. Before mounting, open the locking latches and remove the tub.
2. Insert the connection cable through the back of the housing through the housing opening.
3. Screw on the lamp to the pre-punched attachment points. The dimensions for the ceiling mounting please refer to the above table + drawing.
4. Make power connection to plug-in terminal!  
Attention: PVC insulation of the power cord must be max. 20mm into the housing.
5. Place the pan on the housing and close it with the locking bolts.

#### Technical information:

U: 230V / 50Hz  
Protection class: I  
Protection: IP40 towards the utility room  
Luminaire weight: circa 1,2kg

#### Hints:

„ONLY FOR DRY INTERIORS“  
„SUITABLE FOR PERMANENT INSTALLATION“  
„PERFORM ALL WORK ONLY IN AN ELECTRICALLY DE-ENERGIZED STATE“